
GENERAL NOTES

- I. ONE TREE PER SINGLE FRONTAGE LOT AND TWO TREES PER DOUBLE FRONTAGE LOT.
- 2. TREES SHALL BE MINIMUM IS GALLON AND TYPE SELECTED FROM CITY APPROVED LIST.
- 3. MINIMUM TREE HEIGHT SHALL BE 6' ABOVE TOP OF SIDEWALK.
- 4. PRIOR TO EXCAVATION, OWNER/CONTRAC-OR SHALL NOTIFY U.S.A., 1-800-642-
- 6. ROOT BARRIER SHALL BE FABRICATED FROM A HIGH DENSITY AND HIGH IMPACT PLASTIC SUCH AS POLYVINYL CHLORIDE, ABS OR POLYETHYLENE AND HAVE A MINIMUM THICKNESS OF 0.06. THE PLASTIC SHALL HAVE 1/2-3/4" THE PLASTIC SHALL HAVE 1/2-3/4" HIGH RAISED VERTICAL RIBS ON THE INNER SURFACE SPACED NOT MORE THAN 6-8" APART.

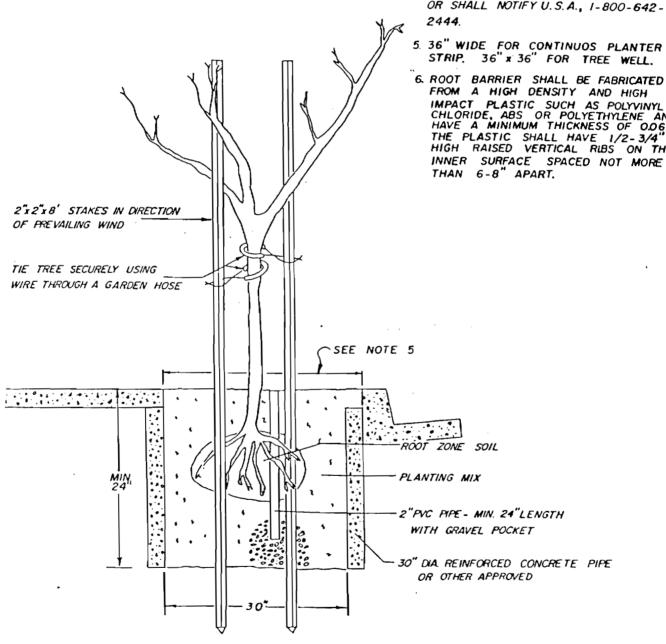

CITY OF UKIAH

TREE PLANTING DETAIL

Scole: NONE Drown By: ML Approved By: Date: MOV., 1986 Revised:(1/89

602